

SB-1180 18-inch Cinema Subwoofer

Features

- Optimized for small room cinema applications
- Requires less than 12 inches (305 mm) behind screen
- 18" (457 mm) woofer with 4" (102 mm) voice coil
- Screw-type barrier-strip connectors



For budget-conscious cinema operators, the SB-1180 extends QSC's commitment to the cinema market by offering high-quality QSC sound for small room systems. Part of the DCS Digital Cinema Speaker Series, the SB-1180 subwoofer offers a unique solution that addresses the extended low frequency requirements of E-Cinema or D-Cinema in small room applications.

The SB-1180 features a single 18" (457 mm) woofer with 4" (102 mm) voice coil for extended bandwidth low frequency reproduction. With an enclosure depth of less than 12 inches (300 mm), the SB-1180 is one of the narrowest subwoofers available, which dramatically reduces space requirements behind the screen.


SB-1180 Details

System Details	SB-1180
Frequency Range ¹ (-10dB)	29 Hz to 170 Hz
Rated Noise Power (Voltage) ²	550 W
Sensitivity ³	98 dB
Maximum continuous SPL ⁴	125 dB
Maximum peak SPL⁴	131 dB
Rated Impedance	8Ω
Maximum Recommended Amplifier Power	1200 Watts
Transducer	18 in. (457 mm) woofer
Enclosure Details	
Input Connector	4-position barrier strip
Enclosure Material	MDF, non-reflective black vinyl
Grille	None
Dimensions (HxWxD)	35.9 x 30 x 11.7 inches (912 x 762 x 297 mm)
Net Weight	97 lb (43.5 kg)

As part of QSC's ongoing commitment to product development, specifications are subject to change without notice.

- 1 Free-field, unprocessed, -10 dB from on-axis sensitivity 2 AES2-1984 noise signal for 2 hrs 3 On-Axis, free-field sensitivity, 2.83V, 1 m

- 4 Calculated from rated noise voltage and sensitivity

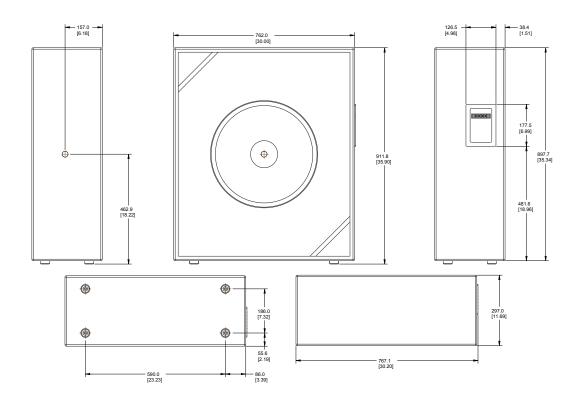

Specifications subject to change without notice.



