
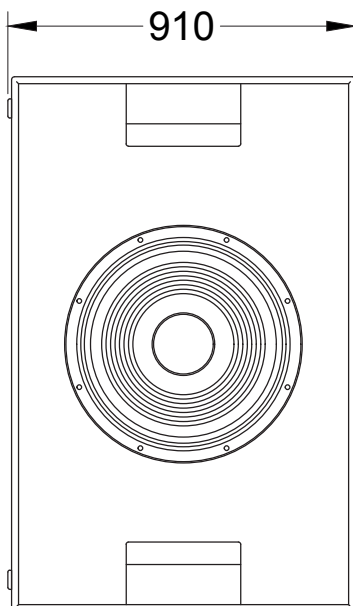


H-SUB

CINEMA SUBWOOFER

Bringing the new edge to the cinema low frequency reinforcement, H-Sub is the innovative high-power 24" subwoofer. It delivers incredible sound pressure while keeping the installation depth in check to fit into very limited behind-the-screen space.

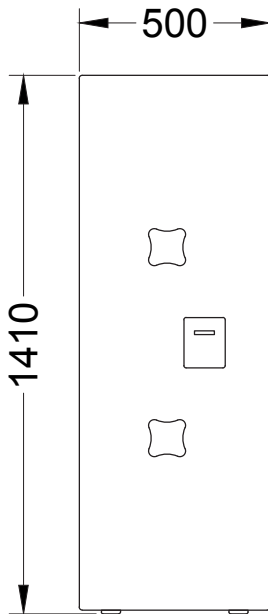

Main features:

- 1600 W nominal power
- 24" woofer with 4,5" voice coil
- 137 dB Max SPL
- Efficient vented box design
- Low installation depth

Frequency range (-10dB)	25 - 120 Hz
Frequency response (± 3 dB)	29 - 120 Hz
Max sound pressure level (peak)	137 dB (calculated)
Sensitivity (1W/1m)	99 dB
LF driver	24"
Impedance	4 Ohm
Nominal power (1)	1600 W
Program power	3200 W
Peak power	6400 W

Acoustical & Electrical data

Connectors	Barrier strip screw terminal
Dimensions (WxHxD)	910x1410x500 mm
Net weight	87 kg
Shipping weight	96 kg
Enclosure materials	Plywood; wear-resistant paint
Color	Black

Connections, physical data

(1) – Based on 2 hours power test, IEC filtered pink noise, 6 dB crest factor