

AJ-1524-BT

(60 lb. WLL)

ADJUSTABLE WIDTH U-BRACKET WALLS & CEILING MOUNT

UB-SERIES



Wall Mounted

Adjustable Loudspeaker Mounting Kits support most of the mountable loudspeakers in the 60 lbs./22 kg. range, or less and its open side arm slots allow a single installer to easily mount loudspeakers in this weight range. Loudspeakers can be rotated within the arms to acquire the desired tilt angle. Separate side holes permit the angle of the speaker to be locked permanently using lag bolts. Since there are only two sizes, inventory requirements are minimal.

Fully captive arm holes permit safe, secure mounting of loudspeakers under balconies, overhangs and from ceilings. The brackets' base gives installers multiple options for placing speakers over irregular and unpredictable mounting surfaces because of its unique mounting slot pattern.



Ceiling Mounted

STANDARD FEATURES:

- ▶ Packed in pairs
- ▶ Two models support most loudspeakers, weighs 60 lbs/22 kg. or less
- ▶ 16" and 24" hole centers match wall studs
- ▶ Open arm slots for one man installation
- ▶ Sound isolation gaskets block sound transmission through walls
- ▶ Permanent angle set capable

OPTIONAL ACCESSORIES:

- ▶ 2-1420 M6 hardware
- ▶ 2-1440 M10 hardware
- ▶ 2-1430 M8 hardware
- ▶ Safety cables

SPECIFICATIONS:

- Material:** Structural Steel Alloy
- Down Tilt:** Up to 60 degrees
- Finish:** Powder Coat
- Color:** Black
- WLL:** 85lbs / 38.6 Kg
- Design Factor:** 7:1 ratio

CONTENTS:

Includes an assortment of 1/4", 5/16" and 3/8" bolts and hardware plus two 1/4" thick sound isolation gaskets.



Rated for indoor use.


ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed loudspeakers can result in property damage, personal injury and/or liability to the installing contractor.


AJ-1524-BT

ADJUSTABLE WIDTH U-BRACKET WALLS & CEILING MOUNT


UB-SERIES

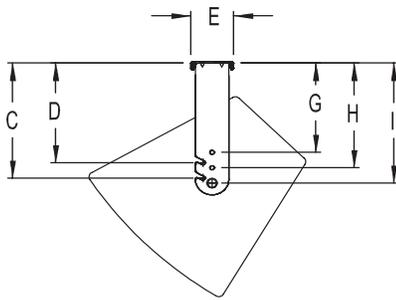


Side view
(ceiling application)



Side view
(wall application)

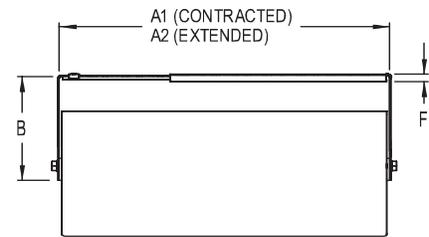

Top view

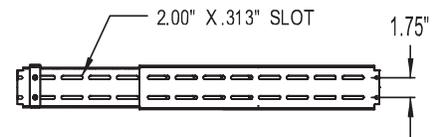

Back view

DIMENSIONS: INCHES/METRIC

AJ-1524 Arms adjust from 15" to 24"

| A1 | A1 | B | C | D | Net Weight |
|-----------|-----------|-------------|------------|------------|-----------------|
| 15" / 381 | 24" / 609 | 11.1" / 283 | 9.5" / 241 | 8.0" / 203 | 5.8 lbs / 2.6Kg |

| E | F | G | H | I | Ship Weight |
|------------|------------|------------|------------|------------|-----------------|
| 3.38" / 86 | 3.38" / 86 | 6.9" / 175 | 8.5" / 216 | 9.9" / 251 | 12 lbs / 5.5 Kg |



Rated for indoor use.

ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed loudspeakers can result in property damage, personal injury and/or liability to the installing contractor.